


BIONYL SATIN

Waterborne interior acrylic paint - Satin

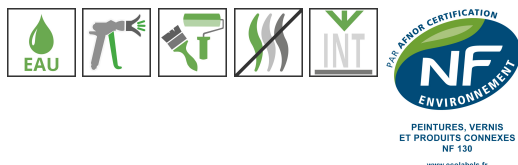

PRODUCT OVERVIEW

Specially designed for large surfaces areas such as commercial sites, parking lots' walls

BENEFITS

Odourless
Good water vapour permeability
High hiding power
Great adhesion
Quick drying
No yellowing
Wet scrub resistance (Class 2 according to NF EN 13300)

AFNOR Classification NFT 36 005 Rating Family I Class 7b2

TECHNICAL SPECIFICATIONS

Finish	: satin
Density	: 1.29 +/- 0,05 Kg/l
Solids by	: Weight: 53 +/- 2% Volume: 40 +/- 2%
VOC (directive 2004/42/CE)	: EU limit value for this product . (cat. A/a): 30 g/l (2010). This product contains max 15 g/IVOC
Flash point	: Not applicable
Gloss level at 60°	: 10 ± 2 %
Practical coverage	: 11 to 13 m²/l per coat depending on surface texture.
Drying time (20°C -65% RH)	: Dry : 1 to 2 h Recoat : 6 h
Colours	: White
Storage	: Can be kept for 1 year in unopened original container. Protect from freezing and high temperatures.

BIONYL SATIN

Waterborne interior acrylic paint - Satin



SURFACE PREPARATION

As stated by DTU 59.1, all surfaces must be clean, dry and free of dirt.

Old glossy painted surfaces must be previously sanded or washed with an appropriate cleaner and then rinsed with water.

Do not apply without proper ventilation.

These recommendations do not override a specific description of the substrate.

APPLICATION

Application conditions	: DTU 59.1
Application equipment	: Brush, Roller, Airless spray-gun.
Clean-up solvent	: Water
Thinner	: Water
Dilution	: Brush (Ready to use), Roller (Ready to use), Airless spray-gun (Ready to use).

SYSTEM RECOMMENDATIONS

Substrate	Primer coat	Top coat
concrete, hydraulic binder-based coating, plasterboard	Apply 1 coat of PRIM O 2010 or IMPRESSION PLACO	Apply 2 coats of BIONYL SATIN
plaster	Apply 1 coat of IKARPRIM	
previously painted surfaces in good condition		

CONTAINER SIZE

15L

SAFETY MEASURES

Refer to the Safety Data Sheet